

# ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Steel Framing system for Dry Lining  
voestalpine Metsec plc



**EPD HUB, HUB-0018**

Publishing date 04 April 2022, last updated date 10 February 2023, valid until 04 April 2027

## GENERAL INFORMATION

### MANUFACTURER

Manufacturer	voestalpine Metsec plc
Address	Broadwell Road Oldbury West Midlands B69 4HF
Contact details	alan.harris@voestalpine.com
Website	https://www.metsec.com/

### EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Construction product
Category of EPD	Third party verified EPD
Scope of the EPD	Cradle to gate with modules C1-C4, D
EPD author	Alan Harris, voestalpine Metsec plc
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal certification <input checked="" type="checkbox"/> External verification
EPD verifier	Elma Avdyli, EPD Hub

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

### PRODUCT

Product name	Steel Framing system for Dry Lining
Additional labels	
Product reference	
Place of production	Oldbury West Midlands United Kingdom
Period for data	Calendar year 2020
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	- %

### ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO <sub>2</sub> e)	2,78E0
GWP-total, A1-A3 (kgCO <sub>2</sub> e)	2,78E0
Secondary material, inputs (%)	13.3
Secondary material, outputs (%)	95.0
Total energy use, A1-A3 (kWh)	8.38
Total water use, A1-A3 (m <sup>3</sup> e)	0.0209

## PRODUCT AND MANUFACTURER

### ABOUT THE MANUFACTURER

Metsec has been manufacturing from its site on Oldbury since 1931. In 1998 the company was acquired by voestalpine becoming voestalpine Metsec plc and the company went from strength to strength following inward investment in machinery and new facilities.

Metsec's parent company voestalpine AG is a leading European manufacturer with steel making facilities and headquarters in Austria.

The group has 500 locations in 50 countries on all 5 continents. Metsec is part of voestalpine's metal forming division (tubes and sections), a leading global provider of high quality metal processing solutions, particularly special tubes and sections, special strip steel and complex components for the automotive and many other industries.

We manufacture, design, train and deliver.

Here at voestalpine Metsec plc our core values are to provide solutions to suit a wide range of construction and manufacturing applications; with high quality, value added, technical experience and excellent customer service.

Our 5 Divisions include:

- Custom Roll Forming
- Dry Lining
- Purlins
- Framing (Metframe & SFS)
- Cable Management

We understand the importance of working at the forefront of the industry and how being compliant with the latest standards is key. For this we are proud to have a large number of accreditations for sustainability, BIM and

quality.

As well as section rolling we also offer a host of additional processing options including:

- Folding
- Welding
- Punching
- Profile Manipulation
- In-Line Piercing
- In-Line High Frequency Induction Welding
- Drilling
- Laser Profiling

We proactively invest in new technology to ensure the evolving expectations of our customers continue to be met or exceeded.

### PRODUCT DESCRIPTION

Galvanized light gauge steel framing profiles and components used in the construction of metal framework for drylining systems.

Metsec's metal framing profiles and components for dry lining systems are used in non-loadbearing partitions, Shaft Encasement systems, Column and Beam Encasement systems, Linings, Ceilings and Floating Floor systems. Metsec's galvanized light gauge drylining steel profiles and components are non-flammable with high strength to weight ratio making it robust and durable for dry lining systems with assured system performance. These steel profiles and components are easy to handle and cut for quick installation on-site.

Metsec dry lining components have been tested as systems with proprietary gypsum products and recommended accessories, providing reassurance that Metsec's section profiles and products meet the stringent standards for fire resistance, duty rating and acoustic requirements when used as a system.

Metsec Dry Lining steel framing profiles and components are manufactured using the cold-roll process in accordance with BS EN

14195:2005/AC:2006

Metsec Dry Lining steel framing profiles and components are manufactured from continuously hot-dip coated flat galvanized steel (Grade: DX51D+Z140 NA-C) that conforms to BS EN 10346:2015 and manufactured using the cold-roll process in accordance with BS EN 14195:2005/AC:2006

Steel gauge of the products ranges from 0.4 -1.5 mm Dimensional specifications of individual product are available on request

Fire Rating Classification = A1

Tensile Strength:- 270-500 N/mm<sup>2</sup>

Density 7.85 g/cm<sup>3</sup>

Minimum Elongation A80(%) = 22%

For more information or for details of your nearest stockist please contact Metsec on +44 (0) 121 601 6075 or Metsec.DryLining@voestalpine.com.

Further information can be found at <https://www.metsec.com/>.

### PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	100	EU and Asia
Minerals	-	-
Fossil materials	-	-
Bio-based materials	-	-

### BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C 0

Biogenic carbon content in packaging, kg C 0

### FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit 1 kg

Mass per declared unit 1 kg

Functional unit -

Reference service life 50 Years in a dry envelope (C1 environment)

### SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

# PRODUCT LIFE-CYCLE

## SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	MND	MND	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

## MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Roll Forming is the process of shaping strip metal by passing it through a series of specially designed shaped rolls, the process has high levels of repeatability and very tight tolerances. Profiles can be made from various metallic materials including Steel, Copper, Aluminium, Brass, Stainless Steel, coated Steels including Zinc, Paint and Plastic. The roll forming process can manufacture typical shaped profiles such as Channel, Angles, Boxes and Round Tube but is also able to form more complex profiles required for demanding technical solutions. The process is highly

automated using modern control systems and can accommodate the piercing of holes and bespoke cut to length requirements of the customer. The process includes fully integrated automated and semi automated packaging reducing handling. The finished product is stored in warehouse facilities prior to shipment to the customer. The manufacturing process requires electricity and fuels for product movement and loading as well as heating. All waste produced at Metsec is sold for recycling or is shipped to Energy Recovery Facilities. The loss of all material is considered. within this EPD

Steel and plastic strapping are used for packaging and is required to ensure safe delivery of product to the customer.

## TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

The transportation distance is defined according to the PCR. Average distance of transportation from production plant to building site is assumed as 214 km and the transportation method is assumed to be lorry (Urban Curtain Sided vehicle Euro 6+ compliant). Vehicle capacity utilization calculated by Metsec is 96% this is governed by the pack size and shape of product and is achieved by utilizing multiple deliveries on the same vehicle. No vehicle is dedicated to a single delivery unless the volume or quantity dictates. In reality, the vehicle utilization does vary but as role of transportation emissions in total results is small, the variety in load is assumed negligible. As the vehicles are dedicated for Metsec deliveries, the km figure calculated assumes the vehicle returns empty. Transportation does not cause losses as product are packaged to prevent damage. Module A5 is excluded in this scenario since voestalpine Metsec plc do not have knowledge of how the installation is executed.

## PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase.

Air, soil, and water impacts during the use phase have not been studied.

## PRODUCT END OF LIFE (C1-C4, D)


Demolition is assumed to consume 0,01 kWh/kg of product. The source of energy is diesel fuel used by construction machines (C1). It is assumed that 100% of the waste is collected and transported to the waste treatment centre. Transportation distance to treatment is assumed as 50 km and the transportation method is assumed to be lorry (C2). Approximately 95% of steel is assumed to be recycled based on World Steel Association, 2020 (C3). It is assumed that the remaining 5 % of steel is taken to landfill for final disposal (C4). Due to the recycling process, the end-of-life product is converted into recycled steel (D).



## MANUFACTURING PROCESS

Cold roll forming is a reliable, proven approach to metal shaping that is ideal for modern applications. This process uses a continuous bending operation where coiled steel is passed through consecutive sets of profiled rolls. Each set of rolls performs incremental parts of a bend to produce the desired cross-section profile. Unlike other types of metal forming, the roll forming process is inherently flexible. Secondary processes can be integrated into a single production line. Roll forming increases efficiency while reducing operational and capital costs by eliminating unnecessary handling and equipment.

Metsec Cold roll forming mills can accommodate material gauges ranging from 0.5 mm up to 0.6.0 mm. The bend radius is largely determined by the ductility of the metal. However, 180-degree bends can be achieved with the right grade of material. Cold roll forming easily accommodates the integration of secondary operations such as welding, punching, and precision laser cutting to optimise production efficiency.

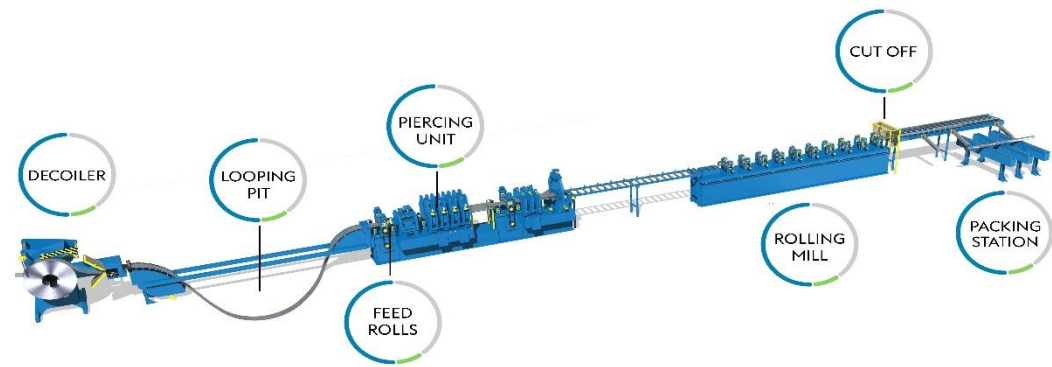

## LIFE-CYCLE ASSESSMENT

### CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

### ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. In this study, as per the reference standard, allocation is conducted in the following order;

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g., mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

In this study allocation could not be avoided for raw materials, packaging, ancillary material, energy consumption and waste production as the information was only measured on factory or production process level. The inputs were allocated to studied product based on annual production volume (mass).

The values for 1 kilogram of Dry Lining Framing System are calculated by considering the total product weight per annual production. In the factory, several kinds of steel products are produced; since the production

processes of these products are similar, the annual production percentages are taken into consideration for allocation. According to the ratio of the annual production of the declared product to the total annual production at the factory, the annual total raw materials, energy consumption, packaging materials and the generated waste per the declared product are allocated. Subsequently, the product output fixed to 1 kg and the corresponding amount of product is used in the calculations. This LCA study is conducted in accordance with all methodological considerations, such as performance, system boundaries, data quality, allocation procedures, and decision rules to evaluate inputs and outputs.

Allocation used in environmental data sources is aligned with the above.

### AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	-
Variation in GWP-fossil for A1-A3	- %


There is no average result considered in this study since the EPD refers to 1 Kg of Dry Lining Framing System produced in one production plant.

### LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent and One Click LCA databases were used as sources of environmental data.



# PRODUCT LIFECYCLE DIAGRAM

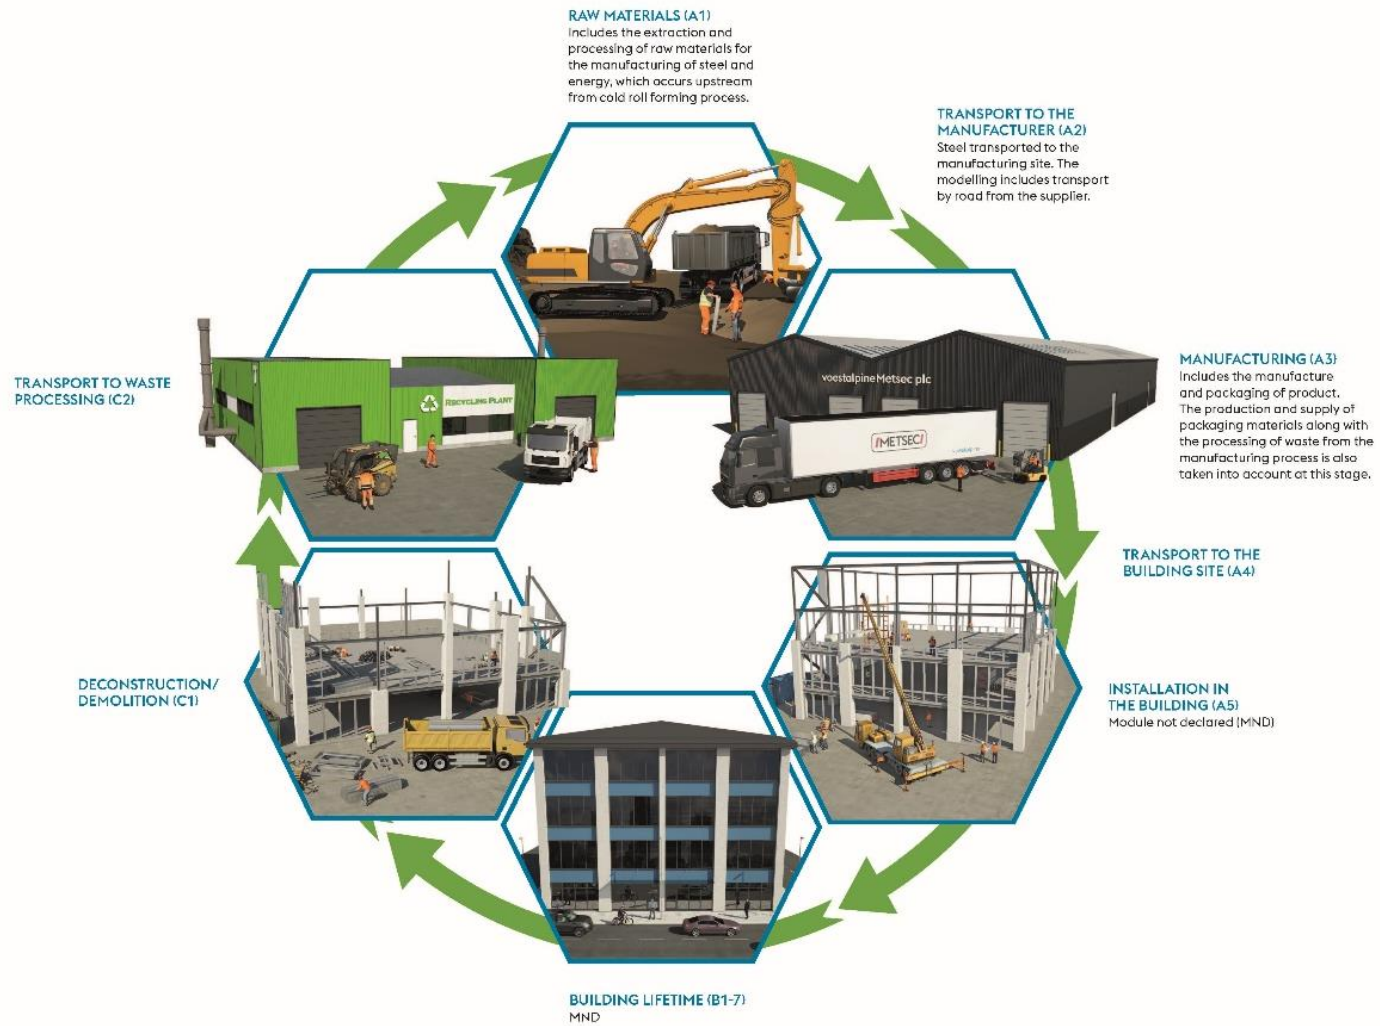

# ENVIRONMENTAL IMPACT DATA

## CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total <sup>1)</sup>	kg CO <sub>2</sub> e	2,65E0	1,1E-1	1,4E-2	2,78E0	3,47E-2	2,81E-2	MND	MND	MND	MND	MND	MND	MND	3,3E-3	4,55E-3	2,21E-2	2,64E-4	-4,16E-1
GWP – fossil	kg CO <sub>2</sub> e	2,65E0	1,1E-1	1,4E-2	2,78E0	3,5E-2	2,81E-2	MND	MND	MND	MND	MND	MND	MND	3,3E-3	4,54E-3	2,34E-2	2,63E-4	-4,19E-1
GWP – biogenic	kg CO <sub>2</sub> e	8,22E-4	2,71E-6	-1,29E-6	8,23E-4	1,88E-5	8,42E-6	MND	MND	MND	MND	MND	MND	MND	9,17E-7	3,3E-6	-1,34E-3	5,22E-7	3,11E-3
GWP – LULUC	kg CO <sub>2</sub> e	4,4E-4	6,13E-5	1,38E-6	5,03E-4	1,26E-5	5,15E-6	MND	MND	MND	MND	MND	MND	MND	2,79E-7	1,37E-6	2,66E-5	7,82E-8	1,16E-5
Ozone depletion pot.	kg CFC-11e	2,53E-14	2,32E-8	2,19E-9	2,54E-8	7,95E-9	3,33E-10	MND	MND	MND	MND	MND	MND	MND	7,12E-10	1,07E-9	3,37E-9	1,08E-10	-1,11E-8
Acidification potential	mol H <sup>+</sup> e	6,16E-3	2,32E-3	3,77E-5	8,52E-3	1E-4	8,62E-5	MND	MND	MND	MND	MND	MND	MND	3,45E-5	1,91E-5	2,84E-4	2,5E-6	-1,62E-3
EP-freshwater <sup>2)</sup>	kg Pe	1,09E-6	6,63E-7	1,17E-7	1,87E-6	2,97E-7	2,17E-8	MND	MND	MND	MND	MND	MND	MND	1,33E-8	3,7E-8	1,62E-6	3,18E-9	-1,68E-5
EP-marine	kg Ne	1,32E-3	5,64E-4	9,2E-6	1,89E-3	1,99E-5	1,91E-5	MND	MND	MND	MND	MND	MND	MND	1,52E-5	5,75E-6	6,27E-5	8,61E-7	-3,18E-4
EP-terrestrial	mol Ne	1,39E-2	6,28E-3	1,01E-4	2,02E-2	2,22E-4	2,05E-4	MND	MND	MND	MND	MND	MND	MND	1,67E-4	6,35E-5	7,28E-4	9,48E-6	-3,37E-3
POCP (“smog”) <sup>3)</sup>	kg NMVOCe	4,6E-3	1,66E-3	3,42E-5	6,29E-3	8,52E-5	6,38E-5	MND	MND	MND	MND	MND	MND	MND	4,59E-5	2,04E-5	1,99E-4	2,75E-6	-2,2E-3
ADP-minerals & metals <sup>4)</sup>	kg Sbe	1,44E-5	1,65E-6	4,78E-8	1,61E-5	9,64E-7	1,7E-7	MND	MND	MND	MND	MND	MND	MND	5,03E-9	7,75E-8	1,3E-6	2,41E-9	-4,16E-7
ADP-fossil resources	MJ	2,75E1	1,5E0	2,14E-1	2,92E1	5,29E-1	2,97E-1	MND	MND	MND	MND	MND	MND	MND	4,54E-2	7,07E-2	3,25E-1	7,36E-3	-3,09E0
Water use <sup>5)</sup>	m <sup>3</sup> e depr.	8,64E-1	3,92E-3	5,05E-4	8,69E-1	1,73E-3	8,7E-3	MND	MND	MND	MND	MND	MND	MND	8,46E-5	2,63E-4	4,61E-3	3,4E-4	-5,96E-2

## USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy <sup>8)</sup>	MJ	9,53E-1	1,49E-2	1,85E-2	9,86E-1	7,57E-3	9,94E-3	MND	MND	MND	MND	MND	MND	MND	2,45E-4	8,9E-4	5,1E-2	5,95E-5	4,11E-2
Renew. PER as material	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Total use of renew. PER	MJ	9,53E-1	1,49E-2	1,85E-2	9,86E-1	7,57E-3	9,94E-3	MND	MND	MND	MND	MND	MND	MND	2,45E-4	8,9E-4	5,1E-2	5,95E-5	4,11E-2
Non-re. PER as energy	MJ	2,75E1	1,5E0	2,14E-1	2,92E1	5,29E-1	2,97E-1	MND	MND	MND	MND	MND	MND	MND	4,54E-2	7,07E-2	3,25E-1	7,36E-3	-3,09E0
Non-re. PER as material	MJ	0E0	0E0	1E-5	1E-5	0E0	1E-7	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Total use of non-re. PER	MJ	2,75E1	1,5E0	2,14E-1	2,92E1	5,29E-1	2,97E-1	MND	MND	MND	MND	MND	MND	MND	4,54E-2	7,07E-2	3,25E-1	7,36E-3	-3,09E0
Secondary materials	kg	1,33E-1	0E0	8,48E-7	1,33E-1	0E0	1,33E-3	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	1,96E-1
Renew. secondary fuels	MJ	8,62E-23	0E0	0E0	8,62E-23	0E0	8,62E-25	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Non-ren. secondary fuels	MJ	1,01E-21	0E0	0E0	1,01E-21	0E0	1,01E-23	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Use of net fresh water	m <sup>3</sup>	2,07E-2	1,93E-4	3,48E-5	0.0209	9,13E-5	2,1E-4	MND	MND	MND	MND	MND	MND	MND	4,01E-6	1,47E-5	1,33E-4	8,05E-6	-2,78E-3

8) PER = Primary energy resources.

### END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	3,16E-9	1,66E-3	3,66E-4	2,03E-3	5,44E-4	2,57E-5	MND	MND	MND	MND	MND	MND	MND	4,88E-5	6,87E-5	0E0	6,87E-6	-5,03E-2
Non-hazardous waste	kg	1,08E-1	5,92E-2	4,72E-3	1,72E-1	3,75E-2	2,09E-3	MND	MND	MND	MND	MND	MND	MND	5,22E-4	7,6E-3	0E0	5E-2	-5,67E-1
Radioactive waste	kg	6,88E-7	1,04E-5	1,18E-6	1,23E-5	3,62E-6	1,59E-7	MND	MND	MND	MND	MND	MND	MND	3,18E-7	4,85E-7	0E0	4,87E-8	2,27E-6

### END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Materials for recycling	kg	0E0	0E0	3,03E-4	3,03E-4	0E0	3,03E-6	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	9,5E-1	0E0	0E0
Materials for energy rec	kg	0E0	0E0	5,3E-7	5,3E-7	0E0	5,3E-9	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0
Exported energy	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MND	MND	MND	MND	MND	MND	MND	0E0	0E0	0E0	0E0	0E0

### ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO <sub>2</sub> e	2,57E0	1,09E-1	1,38E-2	2,7E0	3,47E-2	2,73E-2	MND	MND	MND	MND	MND	MND	MND	3,27E-3	4,5E-3	2,31E-2	2,58E-4	-3,99E-1
Ozone depletion Pot.	kg CFC <sub>11</sub> e	2,53E-14	1,84E-8	1,78E-9	2,02E-8	6,33E-9	2,65E-10	MND	MND	MND	MND	MND	MND	MND	5,63E-10	8,49E-10	2,86E-9	8,59E-11	-9,86E-9
Acidification	kg SO <sub>2</sub> e	5,13E-3	1,84E-3	3,01E-5	7E-3	7,05E-5	7,07E-5	MND	MND	MND	MND	MND	MND	MND	4,87E-6	9,25E-6	1,77E-4	1,04E-6	-1,27E-3
Eutrophication	kg PO <sub>4</sub> <sup>3</sup> e	4,54E-4	2,13E-4	6,83E-6	6,74E-4	1,46E-5	6,88E-6	MND	MND	MND	MND	MND	MND	MND	8,57E-7	1,87E-6	7,21E-5	2,02E-7	-7,02E-4
POCP ("smog")	kg C <sub>2</sub> H <sub>4</sub> e	8,8E-4	5,08E-5	2,69E-6	9,33E-4	4,22E-6	9,38E-6	MND	MND	MND	MND	MND	MND	MND	5,01E-7	5,86E-7	8,28E-6	7,64E-8	-3,28E-4
ADP-elements	kg Sbe	1,44E-5	1,65E-6	4,78E-8	1,61E-5	9,64E-7	1,7E-7	MND	MND	MND	MND	MND	MND	MND	5,03E-9	7,75E-8	1,3E-6	2,41E-9	-4,16E-7
ADP-fossil	MJ	2,75E1	1,5E0	2,14E-1	2,92E1	5,29E-1	2,97E-1	MND	MND	MND	MND	MND	MND	MND	4,54E-2	7,07E-2	3,25E-1	7,36E-3	-3,09E0

## VERIFICATION STATEMENT

### VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

### THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Elma Avdyli, approved verifier by EPD Hub, 04.04.2022

